

Button Operated Electromagnetic Braking

Akshay Sunil Khandale

Dept. of Mechanical

S. B. Patil College of Engineering

Indapur, India

Akshay Dattu Adling

Dept. of Mechanical

S. B. Patil College of Engineering

Indapur, India

Sahil Sultan Mulani

Dept. of Mechanical

S. B. Patil College of Engineering

Indapur, India

Akshay Mohan Gaikwad

Dept. of Mechanical

S. B. Patil College of Engineering

Indapur, India

Abstract— This project aims to create a electromagnetic braking system model capable of applying brakes without any friction loss and without losing the energy supplied. It uses a two electromagnets which runs by the supply of power from the circuit. Also, there is a wheel which is attached to the motor so when the power the supplied, by the help of motor the wheel rotates. Then a fan is attached near electromagnets to cool the electromagnets from excessive heating. A metal bar is in the vicinity of the electromagnets and wheel so when the electromagnets produces eddy currents which stops the rotating wheel or rotor. This model helps in a way to be a used a retardation equipment in vehicles.

Date of Submission: 13-05-2022

Date of acceptance: 27-05-2022

I. Introduction

Electromagnetic brakes (also called electro-mechanical brakes or EM brakes) slow or stop motion using electromagnetic force to apply mechanical resistance (friction). The original name was "electro-mechanical brakes" but over the years the name changed to "electromagnetic brakes", referring to their actuation method. Since becoming popular in the mid-20th century especially in trains and trams, the variety of applications and brake designs has increased dramatically, but the basic operation remains the same. Electromagnetic brakes are the brakes working on the electric power & magnetic power. They works on the principle of electromagnetism. These brakes are an excellent replacement on the convectional brakes due to their many advantages. The reason for implementing this brake in automobiles is to reduce wear in brakes as it frictionless. Electromagnetic brakes are of today's automobiles. The working principle of this system is that when the magnetic flux passes through and perpendicular to the rotating wheel the eddy current flows opposite to the rotating wheel/rotor direction. This eddy current trying to stop the rotating wheel or rotor. This results in the rotating wheel or rotor comes to rest/ neutral.

History

It is found that electromagnetic brakes can develop a negative power which represents nearly twice the maximum power output of a typical engine, and at least three times the braking power of an exhaust brake. (Reverdin 1994). These performance of electromagnetic brakes make them much more competitive candidate for alternative retardation equipments compared with other retarders. By using by using the electromagnetic brakes are supplementary retardation equipment, the friction brakes can be used less frequently, and therefore practically never reach high temperatures. The brake linings would last considerably longer before requiring maintenance and the potentially "brake fade" problem could be avoided. In research conducted by a truck manufacturer, it was proved that the electromagnetic brake assumed 80% of the duty which would otherwise have been demanded of the regular service brake (Reverdin 1974). Further more the electromagnetic brakes prevents the danger that can arise from the prolonged use of brake beyond their capability to dissipate heat. This is most likely to occur while a vehicle descending a long gradient at high speed. In a study with a vehicle with 5 axles and weighting 40 tones powered by a powered by an engine of 310 b.h.p travelling down a gradient of 6% at a steady speed between 35 and 40 m.h.p, it can be calculated that the braking power necessary to maintain this speed of the order of 450 hp. The brakes, therefore, would have to absorb 300 hp, meaning that each brake in the 5 axels must absorb 30 hp, that a friction brake can normally absorb with selfdestruction. The magnetic brake is wall suited to such conditions since it will 9 independently absorb more than 300 hp (Reverdin 1974). It therefore can exceed the

requirements of continuous uninterrupted braking, leaving the friction brakes cool and ready for emergency braking in total safety. The installation of an electromagnetic brake is not very difficult if there is enough space between the gearbox and the rear axle. It did not need a subsidiary cooling system. It relies on the efficiency of engine components for its use, so do exhaust and hydrokinetic brakes. The exhaust brake is an on/off device and hydrokinetic brakes have very complex control system. The electromagnetic brake control system is an electric switching system which gives it superior controllability.

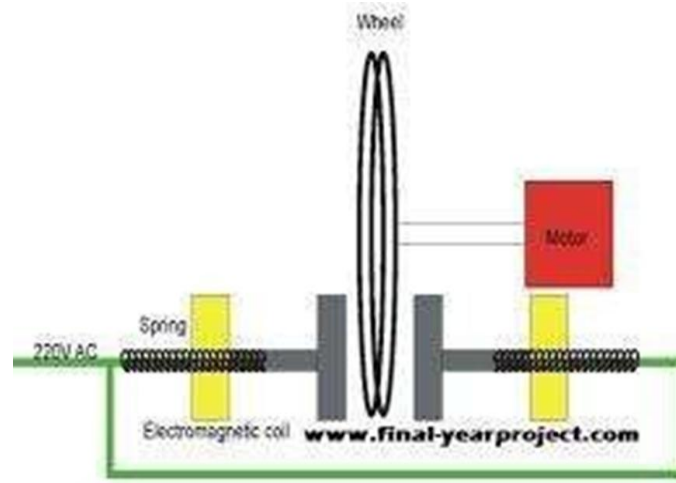


Fig 1.1 Schematic Diagram of Principle of Electromagnetic Braking System

1.3 Types of Braking System

- **Electromagnetic Brake System:**

A rising style of brake system, electromagnetic brakes use an electric motor that is included in the automobile which help the vehicle come to a stop. These types of brakes are in most hybrid vehicles and use an electric motor to charge the batteries and regenerative brakes. On occasion, some buses will use it as a secondary retarder brake.

- **Frictional Brake System:**

A frictional brake system is found in many automobiles. They are service brakes, and typically found in two forms; pads and shoes. As the name implies, these brakes use friction to stop the automobile from moving. They typically include a rotating device with a stationary pad and a rotating weather surface. On most band brakes the shoe will constrict and rub against the outside of the rotating drum, alternatively on a drum brake, a rotating drum with shoes will expand and rub against the inside of the drum.

- **Hydraulic Brake System:**

A hydraulic brake system is composed of a master cylinder that is fed by a reservoir of hydraulic braking fluid. This is connected by an assortment of metal pipes and rubber fittings which are attached to the cylinders of the wheels. The wheels contain two opposite pistons which are located on the band or drum brakes which pressure to push the pistons apart forcing the brake pads into the cylinders, thus causing the wheel to stop moving. xi 1.2 Objectives

- **Primary Objective:**

The main objective of our project is to design and fabricate an Electromagnetic Braking System model.

- **Secondary Objective:**

Besides the main objective, following are our secondary objectives:

1. To understand project planning and execution
2. To understand the fabrication techniques in a mechanical workshop
3. To understand the usage of various mechanical machine tools and also measuring tools
4. To make day to day human life more easier by proper use of technology

1.4 Significances and Scope:

The following are the significances:

1. Electromagnetic brakes satisfy all the energy requirements of braking without the use of friction. They have better heat dissipation capability to avoid problems that friction brakes faces times.
2. They can also be used as a supplementary retardation equipment in addition to the regular friction brakes on heavy vehicles.
3. These brakes's component cost is less so these brakes are cheap. 4. They can be used as an alternative method for the future crisis of the crude oils.

1.5 Limitations:

The following are the limitations:

1. The installation of an electromagnetic brake is very difficult if there is not enough space between the gearbox and rear axle.
2. It cannot use grease or oil.
3. EM brakes are good at slowing things down, not completely stopping them.

II. Methodology :

Basically, this project was to study and analyze electromagnetic braking system as a secondary measure for the hydraulic braking system. First, the base for the electromagnets and the stand for fitting the wheel, is made. Then, a wheel is made and attached to the spook whereas the spook is attached to the stand by the help of bearings. An electromagnet is made by winding the copper wire with the cylindrical body and attached to it's base. Furthermore, an U shaped metal rod is welded with a L shaped metal bar forming a brake shoe and then its end are rest inside the electromagnet. Also a fan is also attached to motor and the motor is attached to the base. So the electromagnet and the motors of wheel and fan are circuited to an external battery and by turning it on, they work respectively.

2.1 Theoretical/Conceptual Framework:

Our model is divided mainly into two different units ;

- 1) Driving Unit.
- 2) Braking Unit.

1) Driving Unit

a) Electric Motor

An Electric motor is an electrical device that converts electrical energy into mechanical energy. In normal motoring mode, most electric motors operate through the interaction between an electric motor's magnetic field and winding currents to generate force within the motor. Electric motors may be classified by electric power source type, internal construction, application, type of motion output, and so on.



Fig 2.1.1: Electric DC motor

b) Wheel

Wheel gets in motion with the help of running motor. Both motor and wheel is connected with the help of connecting chain and chain ring.

c) Power control

This division consists of power supply to whole system and a separate power control system to control the motion of motion.

2) Braking Unit

a) Electromagnet

An electromagnet is a type of magnet in which the magnetic field is produced by an electric current. The magnetic field disappears when the current is turned off. Electromagnets usually consist of insulated wire wound into a coil. A current through the wire creates a magnetic field which is concentrated in the hole in the center of the coil. The wire turns are often wound around a magnetic core.

b) Brake Shoe

It is part that will stop the main wheel when the electromagnet is turned on.

3) Other parts

Spring:

A coil spring, also known as a helical spring, is a mechanical device which is typically used to store energy and subsequently release it, to absorb shock, or to maintain a force between contacting surfaces. Two compression springs are used to push back the brake shoe back in its position.



Fig 2.1.3: Spring

Bearing:

The purpose of Ball Bearing is to reduce rotational friction and support radial and axial loads. In this project 608 2RS type of bearing is used.



Fig 2.1.3(b): Bearing

Working Mechanism:

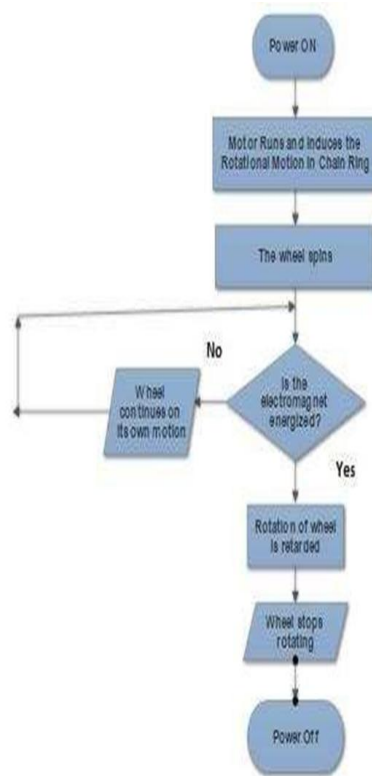


Fig 2.2: Flowchart of the working mechanism

III. CONCLUSION:

This report presents the performance of an electromagnetic braking system which includes various components with its cost effectiveness and efficient methodologies to utilize the supplied energy. With the application of the effective and strong electromagnet we can have greater efficient braking system.

REFERENCES:

- [1]. Journal- Eddy Current in Magnetic Brakes- Henry A. Sudano and Jae Sung Bae
- [2]. Design of a magnetic braking system, Min Jou, Jaw-Kuen Shiau, Chi-Chian Sun
- [3]. Analysis of an eddy-current brake considering finite radius and induced magnetic flux- Journal of Applied Physics, Kapjin Lee, Kyihwan Pa.